

SVS RCA Interconnect 12M - HiFi kabel


Šifra: 18539
Kategorija proizvoda: Oprema za Hi Fi
Proizvođač: SVS

Cena: 69,00 EUR

performance under any conditions and truthful rendering of audio signals, all for a value only SVS can offer.

SVS SoundPath Interconnect Cables are available in convenient lengths ranging from one to 15 meters. The cables are ideal for connecting and getting the best performance possible from your subwoofer, but also any component in your system.

Uncompromised Design and Build Quality

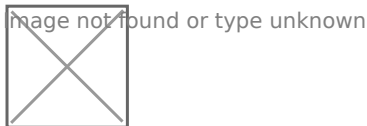

Cable - Materials of Construction:

All new premium cotton braided jacket – attractive, durable, outermost boundary of five-layer dielectric insulation system

High density 7.0mm PVC outside core dielectric – part of five-layer insulation system

1.6mm HDPE inside core dielectric – part of five-layer insulation system, shields each unique conductor

PET Mylar shield layer – part of five-layer insulated system, shields and binds internal structure

RCA Connector - Materials Of Construction:

Precision soldered with high grade lead-free solder – Durable and consistent electrical contacts with consistent signal flow.

SVS RCA Interconnect 12M - HiFi kabel

VS SoundPath RCA Cables are Durable, Truthful, and Affordable

SVS SoundPath Interconnect Cables have a substantial feel thanks to their uncompromised design and build quality. They feature pure copper conductors, 24K gold plated brass connectors and a precision-engineered five-layer dielectric insulation system to reject all RF and electromagnetic interference. The cables offer ultra-high bandwidth and ultra-low capacitance for exceptional

performance under any conditions and truthful rendering of audio signals, all for a value only SVS can offer.

SVS SoundPath Interconnect Cables are available in convenient lengths ranging from one to 15 meters. The cables are ideal for connecting and getting the best performance possible from your subwoofer, but also any component in your system.

24K gold plated brass conductor pin – effective electrical contact and signal flow.

24K gold plated brass split grounding body – tight fit with consistent electrical contact for stable grounding.

Precision machined aluminum shield
Stylish and durable
handling. Reversible
and Right handed
Center Pin and
optimum signal

Electrical Properties:

Conductor DCR = 77 mΩ/meter

Shield DCR: 30 mΩ/meter

Nominal Impedance: 110Ω. Cable and RCA connectors are impedance-matched to minimize Voltage Standing Wave Ratio (VSWR) and Return Loss.