
Firma: Player doo
Adresa: Cvijete Zuzorić 7
Telefon: 097 714 8673
Fax:
PIB: 89978048220
E-mail: info@player.hr

Audient EVO 8 - zvučna kartica

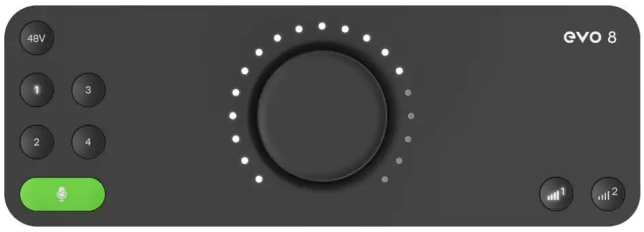

Šifra: 18444
Kategorija prozivoda: Zvučne kartice
Proizvođač: Audient

Cena: 117,00 EUR

Microphone Preamplifier

Mic Gain Range:	58dB
Line Gain Range:	58dB (-10dB pad)
Phantom Power:	48V +/-4V @ 10mA/Channel (only 2 channel available on USB-A host computers
Mic EIN:	<-128dBu
CMRR:	>85dB @ 1kHz
Maximum Input Level:	+16dBu
Input Impedance (Mic):	>3kΩ Balanced
Input Impedance (Line):	>10kΩ Balanced
Frequency Response:	+/-0.5dB 10Hz to 40kHz
Crosstalk:	<-105dBu @ 1kHz & 10kHz
THD+N @ 0dBu (1kHz):	<0.0015%
SNR:	100dB
XLR:	Pin 2 (Hot), Pin 3 (Cold) & Pin 1 (Shield)
1/4” Jack:	TIP (Hot), RING (Cold) & SLEEVE (Shield)

D.I

D.I Gain Range:	58 dB
Maximum Input Level:	+10dBu
Input Impedance:	1MegΩ Unbalanced
Frequency Response	+/-0.5dB 10Hz to 20kHz
THD+N @ 0dBu (1kHz):	<0.3%
SNR:	100dB
1/4” Jack:	TIP (Hot) & SLEEVE (Shield)

ADC Inputs

Digital Reference Level:	0dBFS = +8dBu
Frequency Response:	+/-0.5dB 10Hz to Fs/
Crosstalk:	-105dBu @ 1kHz & 1
THD+N @ -1dBFS (1kHz):	<0.001%
Dynamic Range:	113dB A-weighted

DAC Outputs

Maximum Output Level:	+11dBu
Digital Reference Level:	0dBFS = +11dBu
Output Impedance:	<100Ω Balanced
Frequency Response:	+/-0.5dB 10Hz to Fs/2
Crosstalk:	<-110dBu @ 1kHz
THD+N @ -1dBFS (1kHz):	<0.0015%

Dynamic Range:	113dB A-weighted
1/4” Jack:	TIP (Hot), RING (Cold) & SLEEVE (Shield)

Headphone Output

Output Impedance:	<50Ω
Frequency Response:	+/-0.5dB 10H
Crosstalk:	-110dBu @ 1k
THD+N @ -1dBFS (1kHz):	<0.0015%
Dynamic Range:	113dB A-weig
Max Level Into 30ohms:	+0.5dBu, 0.0
Max Level Into 60ohms:	+4.22dBu, 0.(
Max Level Into 600ohms:	+10.1dBu, 0.(
1/4” Jack:	TIP (Left), RIN

DSP Mixer Roundtrip Lat

(in to out)

44.1 kHz	
48.0 kHz	

88.2 kHz	0.302ms
96.0 kHz	0.281ms

DAW Playback Latency

@ 32 Sample Buffer for Software Instrument Playback

Latency – p
including CP

44.1 kHz	~2.5ms
96.0 kHz	~2ms

DAW Roundtrip Software Monitoring Latency

@ 32 Sample Buffer (in to out)

44.1 kHz	5ms
96.0 kHz	4.1ms

Weight & Dimensions

Weights:	Unit:	0.475kg
	Packaged:	0.815kg
Dimensions:	Unit:	190mm (w) x 70mm (h) x 70mm (d)
	Packaged:	230mm (w) x 105mm (h) x 95mm (d)

Cene su informativnog karaktera. Prodavac ne odgovara za tačnost cena iskazanih na sajtu, zadržava pravo izmena cena. Ponudu za ostale artikle, informacije o stanju lagera i aktuelnim cenama možete dobiti na upit. Plaćanje se isključivo vrši virmanski - bezgotovinski.